## **REL**

## **Edge Lit Recessed LED Downlight**

## **Product Description**

The REL Single CCT Edge Lit Downlight offers an attractive aesthetic with a low profile. The edge-lit technology makes it a practical solution with high performance. Adjustable spring-loaded retention tabs allow a secure fit and easy installation. Perfect for adding light in tight spaces such as hallways, bathrooms, basements, and utility closets.

#### Construction

- Cast aluminum housing routes heat away from electrical components
- Edge-Lit technology allows for extremely thin fixture depth
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Off-board driver minimizes installation height and maximizes fixture life through improved heat management

#### **Optical System**

- Precision engineered optical stack creates uniform light distribution that maximizes lumen output
- Utilizes high performing LEDs with 90+ CRI and an R9 > 50
- CCTs offered at 2700K, 3000K, 4000K, or 5000K

#### **Electrical**

- Input voltage of 120VAC
- Dimmable to 5% with compatible leading edge (TRIAC) or trailing edge (ELV) dimmers
- Operating temperature rating of -4°F to 104°F (-20°C to 40°C)

#### **Finish**

- · White powder coat finish standard
- Color trims available in Black, Nickel or Oil Rubbed Bronze

#### Mounting and Installation

- Spring loaded retention tabs allow for easy installation into ceilings up to ¾" thick with no need for a recessed housing
- Off-board driver/junction box includes three 1/2" KOs and three-port poke-in connectors
- Included paper cut-out template
- Accessory steel rough-in frames and templates available
- $\bullet \ Accessory \ extension \ power \ cables \ (2'\&\ 10') \ available$
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

#### Listings

- cETLus 1598 Classified for wet locations
- CA Title 24 compliant (JA8)
- Certified for direct contact with insulation (IC-Rated)
- Meets Air Tight requirements per ASTM E283
- $\bullet$  Compliant with NFPA  $^{\circ}$  70, NEC  $^{\circ}$  Section 410.16 (A)(3) and 410.16 (C)(5) for closet use
- RoHS Compliant: Free from harmful and hazardous materials
- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions
- LED lumen maintenance: L70(9k)>54,000 hrs
- LM-79, LM-80 testing performed in accordance with IESNA standards

#### Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Project			
Catalog			
Туре			
Date	 		



**REL 4", 6" and 8" Edgelit LED Downlight** 650, 900, 1200 lumen















# Ordering

Ordering Informati	on			Ex	kample : REL611203KRDWH
Series	Version	Voltage	CCT's	Trim Shape	Trim Color
REL4	1	120	2K (2700K)	RD (Round)	<b>WH</b> (White)
REL6			3K (3000K)		
REL8			4K (4000K)		
			5K (5000K)		

Specifications and dimensions subject to change without notice

Accessories	accessories sold separate
4" Black Trim Ring	REL4-1-TR-RD-BK
4" Brushed Nickel Trim Ring	REL4-1-TR-RD-NK
4" Oil-Rubbed Bronze Trim Ring	REL4-1-TR-RD-OB
6" Black Trim Ring	REL6-1-TR-RD-BK
6" Brushed Nickel Trim Ring	REL6-1-TR-RD-NK
6" Oil-Rubbed Bronze Trim Ring	REL6-1-TR-RD-OB
8" Black Trim Ring	REL8-1-TR-RD-BK
8" Brushed Nickel Trim Ring	REL8-1-TR-RD-NK
8" Oil-Rubbed Bronze Trim Ring	REL8-1-TR-RD-OB

Accessories	accessories sold separately
4"White Goof Ring	REL4-1-GR-RD-WH
6"White Goof Ring	REL6-1-GR-RD-WH
2' Extension Cable for REL	REL-EXTCABLE-02
10' Extension Cable for REL	REL-EXTCABLE-10
Frame for 3", 4", 6" remote driver fixtures	MULTIFRAME-346-1
4" Rough In Flat Template	ROUGHIN-TEMPLATE-4
6" Rough In Flat Template	ROUGHIN-TEMPLATE-6
3", 4", 6" Rough In Flat Template	ROUGHIN-TEMPLATE-346

# **Performance Data and Dimming**

Performance Data				
Model Number	Lumens	Watts	Lumens/Watt	
REL411202KRDWH	666		64.7	
REL411203KRDWH	680	10.3	66.0	
REL411204KRDWH	694	10.5	67.4	
REL411205KRDWH	717		69.6	
REL611202KRDWH	902		76.4	
REL611203KRDWH	921	11.8	78.0	
REL611204KRDWH	940	11.0	79.7	
REL611205KRDWH	971		82.3	
REL811202KRDWH	1279		71.5	
REL811203KRDWH	1306	17.9	73.0	
REL811204KRDWH	1333	17.9	74.5	
REL811205KRDWH	1376		76.9	

# Recommended Dimmers\*

Lutron Skylark SELV-300P Lutron Skylark SCL-153P Lutron Skylark CT-603PG Lutron DIVA DVELV-300P Lutron MAELV-600 Lutron PD-10NXD

\*Not a complete list. Check compatibility before installation.




## **Photometric Data**

## REL4

Input Voltage (VAC) 120 System Level Power (W) 10.3 Delivered Lumens (Lm) 666 System Efficacy (Lm/W) 64.7 Correlated Color Temp (K) 2694 Color Rendering Ind 3, R9>50 Be 110.5 Sp 1.25

olor Rendering Index (CRI)	93,
eam Angle	1
oacing Criteria	•
<b>CCT Data Multiplier</b>	
3000K 1.02	1
4000K 1.04	2

1.076



Intensity Summary (Candle Power)		
Angle Mean CP		
0	310	
5	308	
15	298	
25	277	
35	247	
45	209	
55	164	
65	115	
75	65	
85	19	
90 0		

Cone of Light Tabulation				
Mounted height	Footcandles	Diameter		
(Feet)	Beam Center	(Feet)		
4	14.7	11.5		
6	6.6	17.3		
8	3.7	23.1		
10	2.4	28.8		


Zonal Lumen Summary				
Zone	Lumens	% of Luminaire		
0-30	182	27.3%		
0-40	297	44.5%		
0-60	521	78.2%		
0-90	666	100%		
90-180	0	0%		
0-180	666	100%		

## REL6

5000K

Input Voltage (VAC) 120 System Level Power (W) 11.8 Delivered Lumens (Lm) 902 System Efficacy (Lm/W) 76.4 Correlated Color Temp (K) 2728 Color Rendering Index (CRI) 93, R9>50 Beam Angle 113.3 Spacing Criteria 1.28

CCT Data Multiplier		
3000K	1.021	
4000K	1.042	
5000K	1.076	



Intensity Summary (Candle Power)				
Angle Mean CP				
0	310			
5	308			
15	298			
25	277			
35	247			
45	209			
55	164			
65	115			
75	65			
85	19			
90	0			


Cone of Light Tabulation				
Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)		
4	19.3	12.2		
6	8.6	18.2		
8	4.8	24.3		
10	3.1	30.4		

<b>Zonal Lumen Summary</b>						
Zone	Lumens	% of Luminaire				
0-30	241	26.7%				
0-40	395	43.7%				
0-60	700	77.6%				
0-90	902	100%				
90-180	0	0%				
0-180	902	100%				

## REL8

Input Voltage (VAC) 120 System Level Power (W) 17.9 Delivered Lumens (Lm) 1279 System Efficacy (Lm/W) 71.5 Correlated Color Temp (K) 2722 Color Rendering Index (CRI) 93, R9>50 Beam Angle 110.5 Spacing Criteria 1.28

CCT Data Multiplier				
3000K	1.021			
4000K	1.042			
5000K	1.076			



Intensity Summary (Candle Power)			
Angle	Mean CP		
0	439		
5	437		
15	423		
25	395		
35	353		
45	299		
55	233		
65	160		
75	86		
85	22		
90	0		


Cone of Light Tabulation						
Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)				
4	27.4	11.5				
6	12.2	17.3				
8	6.8	23.1				
10	4.4	28.8				

Zonal Lumen Summary						
	Zone	Lumens	% of Luminaire			
	0-30	343	26.8%			
	0-40	563	44%			
	0-60	1001	78.3%			
	0-90	1279	100%			
	90-180	0	0%			
	0-180	1279	100%			

 $Fixture\ tested\ per\ LM-79-08.\ Photometric\ data\ is\ of\ the\ performance\ of\ a\ representative\ fixture.\ Results\ may\ vary\ in\ the\ field.$ 



### Dimensions

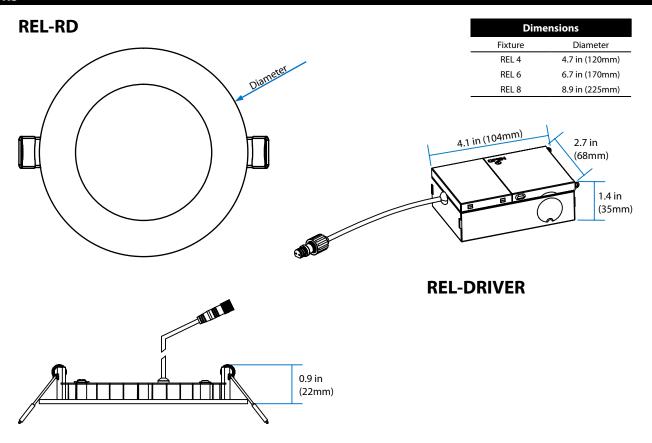

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful

interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- —Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  —Consult the dealer or an experienced radio/TV technician for help.

