



LED Lamps - General Purpose



A-Line Lamps

Current offers a wide variety of GE LED A-line Lamps, featuring various light levels and color temperatures. GE Bright Stik™ lamps provide an option with a sleek form factor. LED A-Line lamps are the perfect low energy, long life replacements for standard incandescent, halogen and CFL lamps.

PERFORMANCE HIGHLIGHTS:

A-Line General Purpose Lamps	
Light Output:	300-2155 Lumens
CRI:	80 & 90
CCT:	2700K, 3000K, 4000K & 5000K
Selectable CCT:	Standard: 2700K/3000K/3500K/4000/5000K Warm: 1800K/2200K/2500K/2700/3000K
Efficiency	Up to 127 LPW
Input Voltage	120
Wattage:	3.5W-19W
Life:	Up to 15,000 hours L70
Temperature Rating:	-20° to 40° C
Rating:	Damp
Dimming:	Dims from 100% to 10%

FEATURES:

- Up to 15,000 hours rated life (L70)
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

BENEFITS:

- Energy + Cost Savings
- A 60-watt incandescent replacement lamp using 10 watts of energy and producing 800 lumens can save over \$82 in energy costs over the rated life of the lamp vs. a standard 840 lumen, 60-watt incandescent A19 based on \$0.11 per kWh
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources

LIMITED WARRANTY

3 years for 15,000 hours
2 years for 10,000 hours

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.






LED Lamps - General Purpose




A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____


A-Line Lamps 80 CRI (Dimmable)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A19															
	E26	6	93156446	LED6DA19/827/E-4PK	120	24	4.3	480	2700K	80	40	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	6	93156447	LED6DA19/830/E-4PK	120	24	4.3	480	3000K	80	40	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	6	93156448	LED6DA19/840/E-4PK	120	24	4.3	480	4000K	80	40	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	6	93156449	LED6DA19/850/E-4PK	120	24	4.3	480	5000K	80	40	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	6	69118	LED6DA19/830	120	6	4.4	480	3000K	80	40	15,000	Yes	Damp	White
	E26	10	93156450	LED10DA19/827/E-4PK	120	24	4.3	800	2700K	80	60	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	10	93156531	LED10DA19/830/E-4PK	120	24	4.3	800	3000K	80	60	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	10	93156532	LED10DA19/840/E-4PK	120	24	4.3	800	4000K	80	60	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	10	93156533	LED10DA19/850/E-4PK	120	24	4.3	800	5000K	80	60	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	12	93156534	LED12DA19/827/E-4PK	120	24	4.7	1100	2700K	80	75	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	12	93156535	LED12DA19/830/E-4PK	120	24	4.7	1100	3000K	80	75	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	12	93156536	LED12DA19/840/E-4PK	120	24	4.7	1100	4000K	80	75	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	12	93156537	LED12DA19/850/E-4PK	120	24	4.7	1100	5000K	80	75	15,000	Yes	Damp, Enclosed	White, 4 pack
	E26	15	93156538	LED15DA19/827-4PK	120	24	4.7	1600	2700K	80	100	15,000	Yes	Damp	White, 4 pack
	E26	15	93156539	LED15DA19/830-4PK	120	24	4.7	1600	3000K	80	100	15,000	Yes	Damp	White, 4 pack
	E26	15	93156540	LED15DA19/840-4PK	120	24	4.7	1600	4000K	80	100	15,000	Yes	Damp	White, 4 pack
	E26	15	93156541	LED15DA19/850-4PK	120	24	4.7	1600	5000K	80	100	15,000	Yes	Damp	White, 4 pack

A-Line Lamps 90 CRI (Dimmable - Glass)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A15															
	E26	3.5	93312022	LED4DFA15-W/927	120	12	3.5	300	2700K	91	40	15,000	Yes	Damp	White, CEC Title 20
	E26	3.5	93142809	LED4DFA15-C-2PK	120	12	3.5	300	2700K	80	40	15,000	Yes	Damp	Clear, 2 pack
	E26	3.5	93142810	LED4DFA15-W-2PK	120	12	3.5	300	2700K	80	40	15,000	Yes	Damp	White, 2 pack
A19															
	E26	4.5	93319141	LED5DFA19/927/E-W	120	24	4.4	450	2700K	90	40	15,000	Yes	Damp, Enclosed	White, CEC Title 20
	E26	4.5	93319147	LED5DFA19/927/E-C	120	24	4.4	450	2700K	90	40	15,000	Yes	Damp, Enclosed	Clear, CEC Title 20
	E26	7	93319153	LED7DFA19/927/E-W	120	24	4.4	800	2700K	90	60	15,000	Yes	Damp, Enclosed	White, CEC Title 20
	E26	7	93319159	LED7DFA19/927/E-C	120	24	4.4	800	2700K	90	60	15,000	Yes	Damp, Enclosed	Clear, CEC Title 20
	E26	8	93319165	LED8DFA19/927-W	120	24	4.4	1100	2700K	90	75	15,000	Yes	Damp	White, CEC Title 20
	E26	8	93319171	LED8DFA19/927-C	120	24	4.4	1100	2700K	90	75	15,000	Yes	Damp	Clear, CEC Title 20
	E26	12	93319177	LED12DFA19/927-W	120	24	4.4	1600	2700K	90	100	15,000	Yes	Damp	White, CEC Title 20
	E26	12	93319183	LED12DFA19/927-C	120	24	4.4	1600	2700K	90	100	15,000	Yes	Damp	Clear, CEC Title 20

A-Line Lamps (High Output)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A21															
	E26	22	93309224	LED22DA21/827	120	4	5.7	2610	2700K	80	150	15,000	Yes	Wet	White
	E26	22	93309225	LED22DA21/850	120	4	5.7	2610	5000K	80	150	15,000	Yes	Wet	White
	E26	23	93309226	LED23A21/827	120	4	5.7	3010	2700K	80	200	15,000	No	Wet	White
	E26	23	93309227	LED23A21/850	120	4	5.7	3010	5000K	80	200	15,000	No	Wet	White

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

Dry Location - Location not normally subject to dampness, but may include a location subject to temporary dampness (i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture)

Wet Location - Location in which water or other liquid can drip, splash, or flow on or against electrical equipment

^ GE Lighting, a Savant company, lamp, distributed Current Lighting Solutions, LLC.



LED Lamps - General Purpose

A-Line Lamps

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____



A-Line Lamps (GU24)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
GU24 Base General Purpose A-Line Lamps															
A19	GU24	10	93156542	LED10DA19/GU24/827/E-4PK	120	24	4.2	800	2700K	80	40	15,000	Yes	Damp, Enclosed	White, 4 pack
A19	GU24	15	93156543	LED15DA19/GU24/827-4PK	120	24	4.4	1600	2700K	80	100	15,000	Yes	Damp	White, 4 pack


A-Line Lamps (3-Way)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
3-Way General Purpose A-Line Lamps															
A19	E26d	4/9/13	93156602	LED13A19/30/100/827-4PK	120	24	4.7	400/980/1400	2700K	80	30/70/100	15,000	-	Damp	White, 4 pack
A21	E26d	5/12/17	93156603	LED17A21/50/150/827-4PK	120	24	5.3	650/1500/2155	2700K	80	50/100/150	15,000	-	Damp	White, 4 pack

A-Line Lamps (Value)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A19															
	E26	5	93142977	LED5A19/827-4PK	120	24	4.3	450	2700K	80	40	10,000	-	Damp	White, 4 pack
	E26	5	93142978	LED5A19/830-4PK	120	24	4.3	450	3000K	80	40	10,000	-	Damp	White, 4 pack
	E26	5	93142979	LED5A19/840-4PK	120	24	4.3	450	4000K	80	40	10,000	-	Damp	White, 4 pack
	E26	5	93142980	LED5A19/850-4PK	120	24	4.3	450	5000K	80	40	10,000	-	Damp	White, 4 pack
	E26	9	93142981	LED9A19/827-4PK	120	24	4.3	760	2700K	80	60	10,000	-	Damp	White, 4 pack
	E26	9	93142982	LED9A19/830-4PK	120	24	4.3	760	3000K	80	60	10,000	-	Damp	White, 4 pack
	E26	9	93142983	LED9A19/840-4PK	120	24	4.3	760	4000K	80	60	10,000	-	Damp	White, 4 pack
	E26	9	93142984	LED9A19/850-4PK	120	24	4.3	760	5000K	80	60	10,000	-	Damp	White, 4 pack
A21															
	E26	11	93142985	LED11A21/827-4PK	120	24	5.2	1050	2700K	80	75	10,000	-	Damp	White, 4 pack
	E26	11	93142986	LED11A21/830-4PK	120	24	5.2	1050	3000K	80	75	10,000	-	Damp	White, 4 pack
	E26	11	93142987	LED11A21/840-4PK	120	24	5.2	1050	4000K	80	75	10,000	-	Damp	White, 4 pack
	E26	11	93142988	LED11A21/850-4PK	120	24	5.2	1050	5000K	80	75	10,000	-	Damp	White, 4 pack
	E26	15	93142989	LED15A21/827-4PK	120	24	5.2	1520	2700K	80	100	10,000	-	Damp	White, 4 pack
	E26	15	93142990	LED15A21/830-4PK	120	24	5.2	1520	3000K	80	100	10,000	-	Damp	White, 4 pack
	E26	15	93142991	LED15A21/840-4PK	120	24	5.2	1520	4000K	80	100	10,000	-	Damp	White, 4 pack
	E26	15	93142992	LED15A21/850-4PK	120	24	5.2	1520	5000K	80	100	10,000	-	Damp	White, 4 pack

LED Bright Stik™

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
LED Bright Stik™															
	E26	5.5	66256	LED5.5LS3/827	120	48	4.45	450	2700K	80	40	15,000	-	Damp	3 pack
	E26	5.5	75177	LED5.5LS3/850	120	48	4.45	450	5000K	80	40	15,000	-	Damp	3 pack
	E26	9	75184	LED9LS3/827	120	48	4.45	800	2700K	80	60	15,000	-	Damp	3 pack
	E26	9	75588	LED9LS3/850	120	48	4.45	800	5000K	80	60	15,000	-	Damp	3 pack
	E26	12	75590	LED12LS2/827	120	32	5.24	1250	2700K	80	75	15,000	-	Damp	2 pack
	E26	12	75591	LED12LS2/850	120	32	5.24	1250	5000K	80	75	15,000	-	Damp	2 pack
	E26	15	75593	LED15LS2/827	120	32	5.24	1700	2700K	80	100	15,000	-	Damp	2 pack
	E26	15	75644	LED15LS2/850	120	32	5.24	1700	5000K	80	100	15,000	-	Damp	2 pack

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

Dry Location - Location not normally subject to dampness, but may include a location subject to temporary dampness (i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture)


Wet Location - Location in which water or other liquid can drip, splash, or flow on or against electrical equipment



LED Lamps - General Purpose

A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____

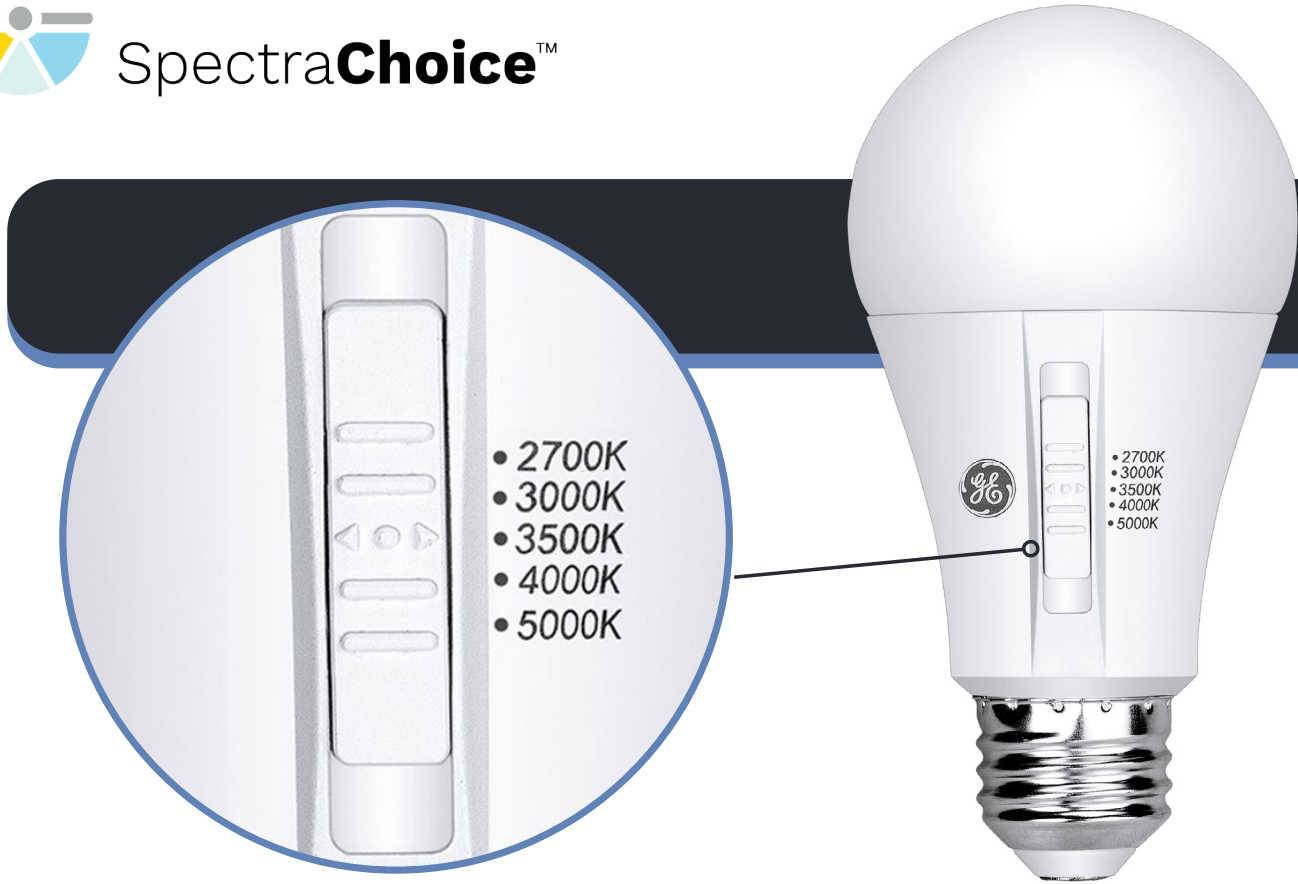

Selectable SpectraChoice™ A-Line Lamps (Dimmable)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (In)	Lumens (Initial) ³	Selectable Color Temp. (Initial)*	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A-Line SpectraChoice™ Selectable Color Temperature															
A19	E26	6	93313531	LED6DA19/9SC/E	120	24	4.3	480	2700K* 3000K 3500K 4000K 5000K	90	40	15,000	Yes	Damp, Enclosed	White, CEC Title 20
A19	E26	10	93313549	LED10DA19/9SC/E	120	24	4.3	800	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp, Enclosed	White, CEC Title 20
A19	E26	13	93313543	LED13DA19/9SC	120	24	4.7	1100	2700K* 3000K 3500K 4000K 5000K	90	75	15,000	Yes	Damp	White, CEC Title 20
A19	E26	15	93313537	LED15DA19/9SC	120	24	4.7	1600	2700K* 3000K 3500K 4000K 5000K	90	100	15,000	Yes	Damp	White, CEC Title 20

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations


* Default color temperature setting noted by "*" in tables above



LED Lamps - General Purpose

A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____

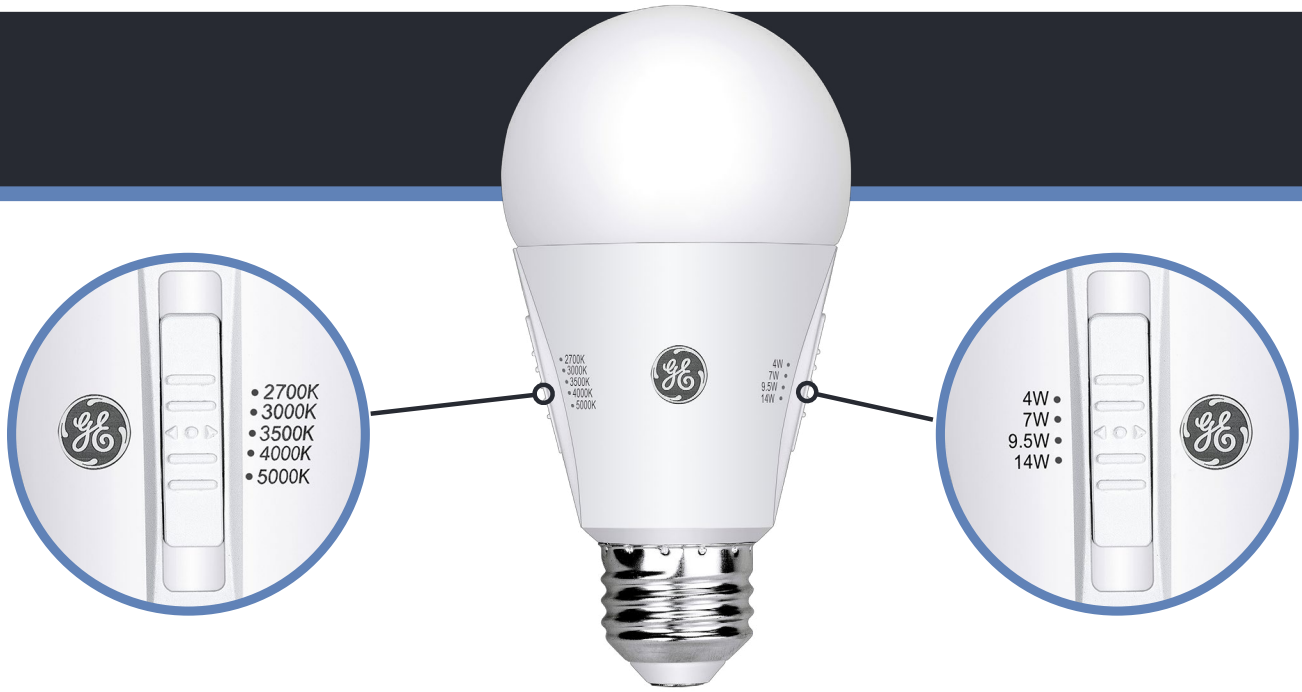

Selectable LumenChoice® + SpectraChoice™ A-Line Lamps (Dimmable)

Bulb Shape	Base Type	Order Code	Description	Volts	Carton Qty ²	MOL (In)	Selectable Watts*	Selectable Lumens (Initial)*	Selectable Color Temp. (Initial)*	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A-Line Selectable LumenChoice® + SpectraChoice™															
A19	E26	93322361	LED/LC/DA19/9SC	120	12	4.7	4 7* 9.5 14	500 800* 1100 1600	2700K* 3000K 3500K 4000K 5000K	90	40 60 75 100	15,000	Yes	Damp	White, CEC Title 20

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

* Default wattage and color temperature settings noted by "*" in tables above



LED Lamps - General Purpose

A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____



Warm Selectable LumenChoice® + SpectraChoice™ A-Line Lamps (Dimmable)

Bulb Shape	Base Type	Order Code	Description	Volts	Carton Qty ²	MOL (In)	Selectable Watts*	Selectable Lumens (Initial)*	Selectable	Wattage Replacement	CRI	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
									Color Temp. (Initial)*						
A-Line Warm Selectable LumenChoice® + SpectraChoice™															
								350	1800K	40W					
								400	2200K	40W					
							4	450	2500K	40W					
								500	2700K	40W					
								500	3000K	40W					
								600	1800K	60W					
								700*	2200K*	60W					
							7*	750	2500K	60W					
								800	2700K	60W					
								800	3000K	60W					
A19	E26	93322367	LED/LC/DA19/9WSC	120	12	4.7		800	1800K	75W	90	15,000	Yes	Damp	White, CEC Title 20
								900	2200K	75W					
							9.5	1000	2500K	75W					
								1100	2700K	75W					
								1100	3000K	75W					
								1100	1800K	100W					
								1300	2200K	100W					
							14	1500	2500K	100W					
								1600	2700K	100W					
								1600	3000K	100W					

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

* Default wattage and color temperature settings noted by "*" in tables above