

LED Multi Wattage Multi CCT 10" Square Canopy Light



Bronze color available



With optional sensor (purchased separately)

MOUNTING OPTION:



Wall Mounting
Quick Mount Back Plate

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish

OPTICAL SYSTEM:

Seoul 2835 LED chips. Frosted lens. 147° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- Default Wattage: 75W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Garages
- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

DLC Product ID:

- LOC-10SQCP-MW(40/50/60/75)MCCT(30/40/50)-LV – S-RS4K



OPTIONAL ACCESSORIES:



Microwave Sensor
LOC-ACY-S-MWS-01-G1
(Compatible with LOC-RC-WHITE-G1)



Microwave Bluetooth Sensor
LOC-ACY-S-MWS-BT-01-G1
(Compatible with App)



PIR Sensor
LOC-ACY-S-PIRS-01-G1
(Compatible with LOC-RC-WHITE-G1)



PIR Bluetooth Sensor
LOC-ACY-S-PIRS-BT-01-G1
(Compatible with App)



Remote Control
LOC-RC-WHITE-G1



Emergency Battery
LOC-EMDR-8W-AC

WATTAGE	BUG RATING
40W/50W/60W/75W	B3-U3-G3


LOC-10SQCP-MW(40/50/60/75)MCCT(30/40/50)-LV

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K / 4000K / 5000K	5,520LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
50W	3000K / 4000K / 5000K	6,900LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
60W	3000K / 4000K / 5000K	8,280LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
75W	3000K / 4000K / 5000K	10,350LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID

LOC-10SQCP-MW(40/50/60/75)MCCT(30/40/50)-LV-EM with Emergency Battery

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K / 4000K / 5000K	5,520LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
50W	3000K / 4000K / 5000K	6,900LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
60W	3000K / 4000K / 5000K	8,280LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID
75W	3000K / 4000K / 5000K	10,350LM	138lm/W	120-277V	70	0.9	15%	100W – 320W HID

MEASUREMENTS

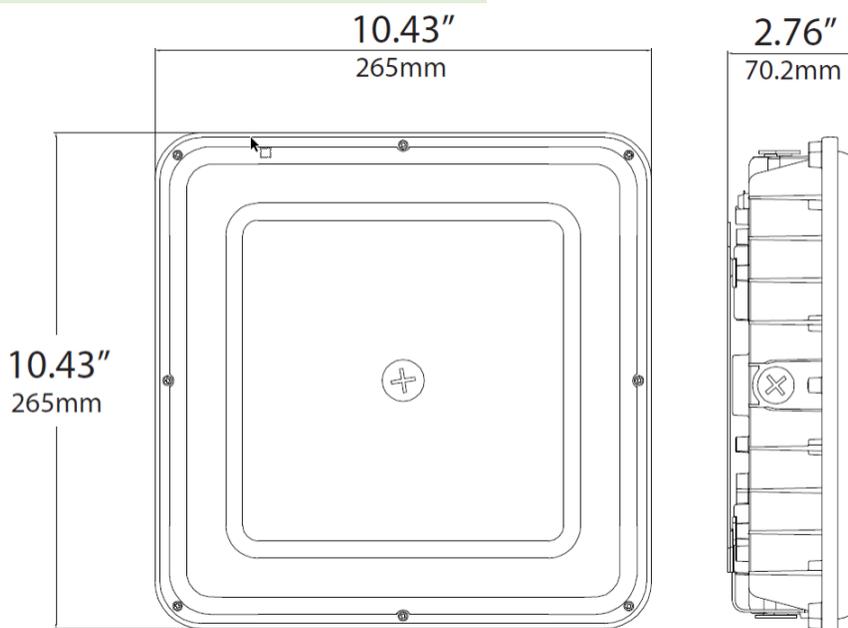

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-10SQCP-MW(40/50/60/75)MCCT(30/40/50)-LV (white)	1	4.45lbs	14.17" x 11.02" x 12.2"	19.84lbs	4	008150947329
LOC-10SQCP-MW(40/50/60/75)MCCT(30/40/50)-LV (bronze)	1	4.45lbs	14.17" x 11.02" x 12.2"	19.84lbs	4	008150948456