

LED Double Headlight Combo Emergency Light



Color Options:

- Green Letters
- Red Letters

CONSTRUCTION:

High impact UV stabilized flame rated thermoplastic housing (UL94 V-0) Nickel Cadmium (Ni-Cad) battery meets UL 90-minute emergency lighting requirement. Test switch and AC-On indicator included.

WARRANTY:

2-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120V/277V AC input. 0°C to 40°C, 32°F to 104°F

INSTALLATION & MOUNTING:

Wall, ceiling, or end mount capabilities.

FEATURES

- 120V or 277V AC input
- UL 924 listed for damp locations (DL)
- This product is Title 20 compliant
- Canopy included
- Long lasting LEDs
- Easy installation and maintenance
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Stairways
- Hallways
- Doorways
- Bathrooms
- Corridors





LOC-EXIT-2WGLW-SCOM

WATTAGE	EMERGENCY WATTAGE	RE-CHARGE TIME	BATTERY	VOLTAGE
2W	1W	24 hours	Ni-cad 3.6V/1000mAh	120V or 277V

LOC-EXIT-2WRLW-SCOM

WATTAGE	EMERGENCY WATTAGE	RE-CHARGE TIME	BATTERY	VOLTAGE
2W	1W	24 hours	Ni-cad 3.6V/1000mAh	120V or 277V

MEASUREMENTS

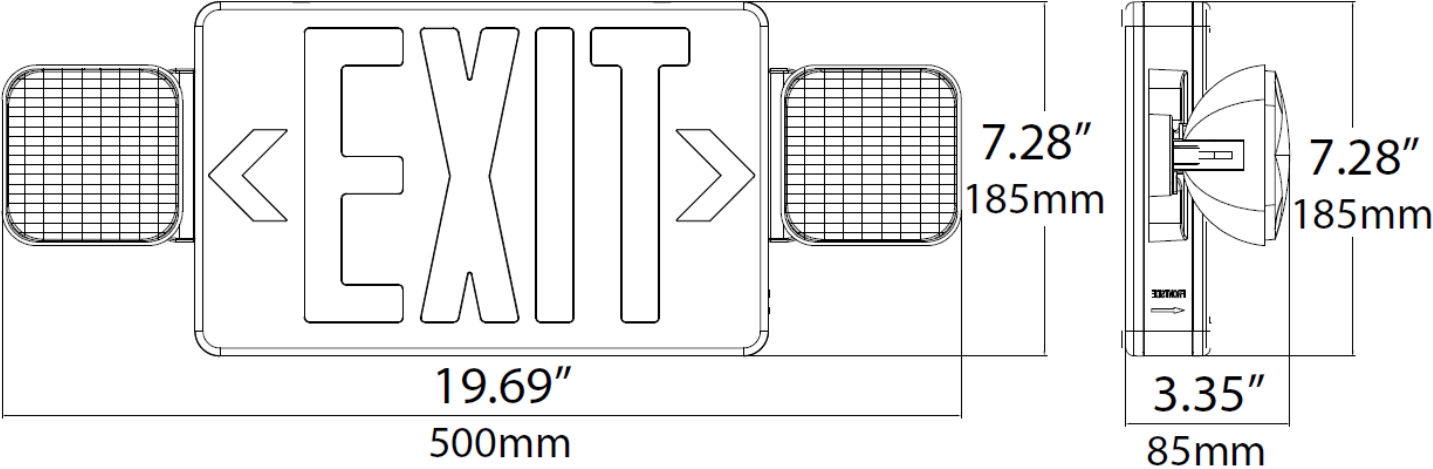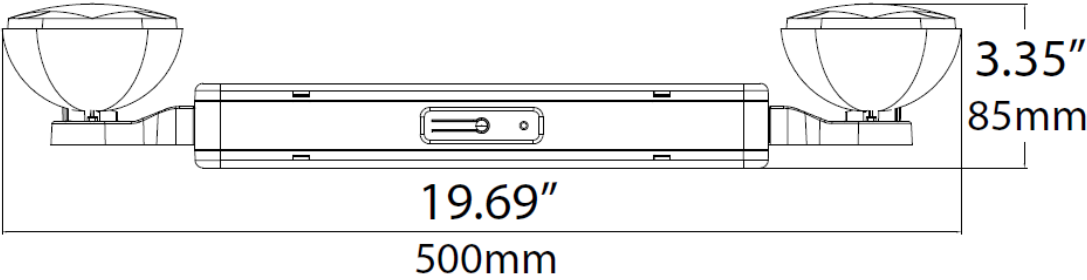

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-EXIT-2WGLW-SCOM	1	2.65 lbs	00810050943420
LOC-EXIT-2WRLW-SCOM	1	2.65 lbs	00810050943413