



CONSTRUCTION:

Lithium batteries. Mono-crystalline silicon solar panels.

OPTICAL SYSTEM:

Philips Lumileds 5050

WARRANTY:

5-year limited warranty. Actual performance may differ because of end-user environment and application.

ELECTRICAL:

Operating Temperature:

Charge: 0°C to 60°C (32°F to 140°F)

Discharge: -20°C to 60°C (-4°F to 140°F)

Storing Temperature:

-20°C to 60°C (-4°F to 140°F)

CONTROLS & DIMMING:

On/Off and dimming. Programmable smart lighting.

FEATURES

- Light On/Off and dimming
- IP66 rated
- IK08 rated
- Working Mode: 100% brightness with motion / 30% brightness without motion
- Working Time: 14 hours
- Easy to install directly on to a pole
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Streets / Roadway / Private Roads
- Pathway / Sidewalk / Ramp
- Building Surroundings
- Urban & Residential Streets
- Car Parks

WATTAGE	BUG RATING
20W	B1-U0-G1



OPTIONAL ACCESSORIES:




Remote Controller
LOC-RC-BLK-ORG

LOC-PTSL-20W							
WATTAGE	SOLAR PANEL POWER	BATTERY	LUMENS	EFFICACY	CCT	CRI	Product Dimensions
20W	25W/18V	12.8V/12AH	3,500LM	175lm/W	5,000K	70	

MEASUREMENTS

LOC-PTSL-20W

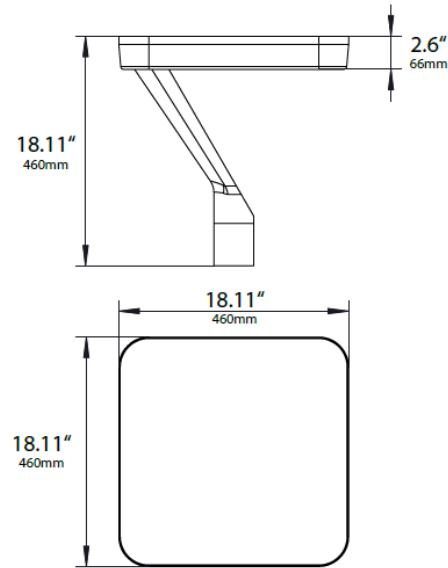

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-PTSL-20W	1	26.46lbs	20.67" x 21.26" x 24.8"	61.73lbs	1	00810050949934