

LDN4 | LDN6



Features

- New construction downlight for applications such as corridors, lobbies, conference rooms and private offices
- 16-gauge galvanized steel mounting/plaster frame
- Vertically adjustable mounting brackets providing 3-3/4" total adjustment
- Maximum 1-1/2" ceiling thickness
- Designed to provide at least 70% light output at 50,000 hours
- Aluminum reflectors that are optically designed to maximize lumen output and provide superior glare control
- Includes dimming driver with 10% minimum dimming level
- Switchable color temperatures (3000K, 3500K, 4000K, and 5000K) and switchable lumens (500-1000LM, 1000-2000LM, 2000-3000LM) available



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Pallet Quantity	
LDN4 35/10 MVOLT GZ10 HSG	193048378481	4" LED New Construction Downlighting	26TRT	1,000	10.6W	3500K	120-277V	96	CS
LDN4 35/15 MVOLT GZ10 HSG	193048372816	4" LED New Construction Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96	CS
LDN4 35/20 MVOLT GZ10 HSG	193048377873	4" LED New Construction Downlighting	42TRT	2,000	22.1W	3500K	120-277V	96	CS
LDN6 35/10 MVOLT GZ10 HSG	193048377323	6" LED New Construction Downlighting	26TRT	1,000	10.4W	3500K	120-277V	96	CS
LDN6 35/15 MVOLT GZ10 HSG	193048375787	6" LED New Construction Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96	CS
LDN6 35/20 MVOLT GZ10 HSG	193048380026	6" LED New Construction Downlighting	42TRT	2,000	22.5W	3500K	120-277V	96	CS

CS Denotes Contractor Select Product


Trim Kits

Catalog Number	UPC	Description	
L04AR LSS TRIM	745972691343	4" Open Semi-Specular, Clear	CS
LW4AR LSS TRIM	190887165678	4" Open Wallwash Semi-Specular, Clear	CS
L06AR LSS TRIM	745972691619	6" Open Wallwash Semi-Specular, Clear	CS
LW6AR LSS TRIM	190887157093	6" Open Wallwash Semi-Specular, Clear	CS

CS Denotes Contractor Select Product

Dimensions

LDN4

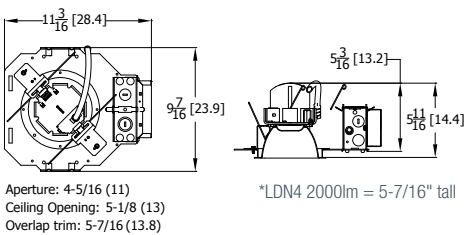

LDN6

