



N4X-EPX

NEMA 4X | WET | COLD | SANITATION



PROJECT:

FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:



SPECIFICATIONS: INTERNAL


Standard 120/277V input. The N4X-EPX is designed with an internal, maintenance free, valve regulated sealed lead-acid battery or optional Ni-Cad battery providing emergency lighting duration of 90 minutes. Fuse protection is standard.

SPECIFICATIONS: EXTERNAL

The N4X-EPX comes standard in gray. Wall, ceiling or end mounting configurations are available. Ceiling and end mount versions come complete with a factory installed weatherproof steel canopy. Single face versions only.

Removable chevron arrows are standard on each unit along with an external LED status indicator and test switch. Four polycarbonate pressure screws firmly hold the face to the housing. Top or side mounted emergency heads are fully adjustable. N4X-EPX is available with many style heads with LED and incandescent options.

DIMENSIONS

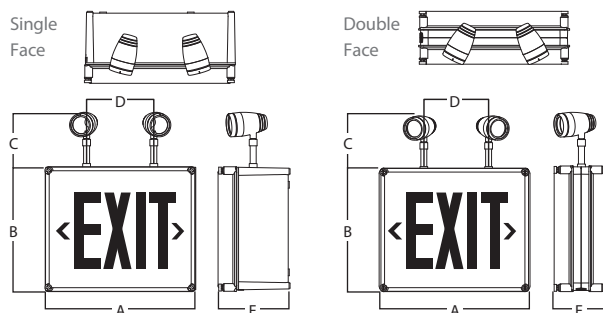

Model	A	B	C	D	E
Single Face	14 1/4"	12"	5 1/4"	6 1/2"	6 3/4"
	362mm	305mm	133mm	165mm	171mm
Double Face	14 1/2"	12"	5 1/4"	6 1/4"	5"
	368mm	305mm	133mm	159mm	127mm

WARRANTY

The N4X-EPX comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.



ORDERING INFORMATION

Series	Operation	Pb-A (Capacity) ¹	Ni-Cd ² (Capacity)	LED	Face No.	Mounting	Emergency Heads	Lamps	Options	
N4X-EPX	6 (6V)	12 (6V)	22 (6V)	R (red)	1 (single)	W (wall)	0 (no heads)	See lamps	SD (self-diagnostic)	
	12 (12V)	18 (6V)	42 (6V, 12V)	G (green)		C (ceiling)	1LR ³ (single PAR36)	selection on	BZ (audible alarm - buzzer)	
		27 (6V, 12V)	54 (6V)			E (end)	2LR ³ (double PAR36)	next page	IH ⁶ (internal heater)	
		36 (6V, 12V)	90 (6V, 12V)				1H2O ⁴ (one MR16 head)			IRT ⁷ (infrared testing)
		60 (6V, 12V)					2H2O ⁴ (two MR16 heads)			NC ² (nickel-cadmium battery)
		72 (6V, 12V)					1MEGASQ (One head)			SM (side mount heads)
		120 (6V, 12V)					2MEGASQ (Two heads)			SW (special wording)
		Accessories					TD ⁸ (time delay)			

1PK12B⁹ (12" black pendant kit)

BPG6⁵ (wireguard, wall mount w/ top heads)

1PK12BA (12" brushed alum pendant kit)

WG9DX20LX19WWHT (wireguard, wall mount)

1PK12W⁹ (12" white pendant kit)

NOTE 1: Certain capacities and/or options may require a larger housing

NOTE 2: Must select NC option and Ni-Cd capacity for nickel cadmium battery

NOTE 3: Heads are supplied standard weatherproof

NOTE 4: H2O heads are NEMA 4X rated

NOTE 5: Wireguard for N4X-EPX wall mount with top mounted heads only

NOTE 6: Must specify AC Voltage

NOTE 7: Available only if ordered with no heads. HHC (controller for IRT) should be ordered separately

NOTE 8: Must specify 5, 10, or 20 mins and AC Voltage (10 min std)

NOTE 9: Pendant stem available in std 12, 24, 48" lengths, consult factory for custom lengths

EXAMPLE: N4X-EPX-6-27-R-1-W-2LR6WLEDSB-SD



N4X-EPX

NEMA 4X | WET | COLD | SANITATION



PROJECT:

FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:

SPECIFICATIONS: ELECTRICAL

BATTERY: The N4X-EPX is designed with an internal, maintenance-free, valve regulated sealed lead-acid or Ni-Cd battery providing 90 minutes of emergency lighting. Recharge time of the battery is 48 hours. The battery operating temperature without the internal heater/ thermostat option is 10 to 40°C; with the internal heater (IH) option the minimum battery operating temperature is -20°C.

CIRCUIT: The N4X-EPX utilizes a high-efficiency two stage charger providing precise float voltage control with low voltage disconnect protection. All components used in the circuitry are temperature compensated. The charger also has brownout and short circuit protection. Charger status is easily determined via a dual diagnostic LED display which indicates AC/ON and High Charge. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit and lamp load.

SELF-DIAGNOSTIC

The N4X-EPX self-diagnostic feature automatically monitors the functional operation of the unit. Self-diagnostic monitors the operation of the lamps, battery and circuitry and displays any alerts. Periodic emergency tests, up to ninety (90) minutes duration are simulated to ensure proper operation during an actual power failure. Operating status is visually displayed by multi-function LED indicator light.

	Steady Green :	Normal Operation
	Flashing Green :	AC Interruption in Last 48 Hours
	Steady Yellow :	Lamp Circuit Malfunction
	Flashing Yellow :	Self-diagnostic or Manual Test in Progress
	Steady Red :	Battery Failed Testing
	Flashing Red :	Battery Disconnected or Charger Malfunction

SPECIFICATIONS: EXTREME CLIMATE DESIGN

The N4X-EPX has been designed to perform in applications where the climate would punish any standard sign. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient silicone gasket. The liquid gasketing is “hot-bonded” to the lens during the manufacturing process. This procedure eliminates any chance of the gasketing to become dry and pull away from the lens. The gasketing always holds its original form and has “memory retention” so that it effectively and consistently protects the N4X-EPX from moisture. The N4X-EPX can also be equipped with an optional thermostatically controlled heater for cold environments.

SPECIFICATIONS: MECHANICAL

The N4X-EPX housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for damp and wet locations with a hot-bonded silicone gasket. Exit face is made from a high clarity, clear polycarbonate that has been painted white on the internal side only, making the unit highly scratch resistant. Custom face colors and special wording / graphics are available, please specify.

SANITATION LISTED

The N4X-EPX is sanitation approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

LAMP SELECTION

	6V	12V
Incandescent (W) ¹	7.2, 9W	9, 12, 18W
Halogen (H) ²	12W	12, 20, 55W
MR16 (W) ³	N/A	50W
MR16 LED (WLED) ⁴	5, 7W	2, 5, 7W
MEGASQ ⁵	N/A	5, 9, 14, 30W
SEALED BEAM LED ⁶	N/A	6W

NOTE 1: Available in LR lamp heads (ex: 2LR9W)

NOTE 2: Available in LR lamp heads (ex: 2LR12Q)

NOTE 3: Available in H2O lamp heads (ex: 2H2O50W)

NOTE 4: Available in H2O lamp heads (ex: 2H2O5WLED)

NOTE 5: Nomenclature example: 2MEGASQ9W

NOTE 6: Available in LR lamp heads (ex: 2LR6WLEDSB)

MODEL RATING GUIDE Pb-A (CAPACITY)

Model	Input Voltage	Wattage Rating 90 Minutes
N4X-EPX-6-12	6	12
N4X-EPX-6-18	6	18
N4X-EPX-6-27	6	27
N4X-EPX-6-36	6	36
N4X-EPX-6-60	6	60
N4X-EPX-6-72	6	72
N4X-EPX-6-120 ¹	6	120
N4X-EPX-12-12	12	12
N4X-EPX-12-27	12	27
N4X-EPX-12-36	12	36
N4X-EPX-12-65	12	65
N4X-EPX-12-72	12	72
N4X-EPX-12-120 ¹	12	120

NOTE 1: Requires a larger cabinet size. Please contact factory

MODEL RATING GUIDE Ni-Cd(CAPACITY)

Model	Input Voltage	Wattage Rating 90 Minutes
N4X-EPX-6-22	6	22
N4X-EPX-6-42	6	42
N4X-EPX-6-54 ¹	6	54
N4X-EPX-6-90 ¹	6	90
N4X-EPX-12-45	12	45
N4X-EPX-12-90 ¹	12	90
N4X-EPX-12-130	12	130

Note 1: Requires a larger cabinet size. Please contact factory.

WARRANTY

The N4X-EPX comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.