

NF-R246

Universal New Construction Frame-In for LED luminaires

Type	
Project	
Catalog No.	
Notes	

PRODUCT DESCRIPTION


Universal new construction frame-in can be used to assist installing canless recessed downlights. Includes multiple cut outs for 2", 4" and 6" LED luminaires

Mounting: Bar hangers are adjustable from 13-3/4" to 26" with integral nails. Bar hangers are slotted for T-bar ceiling grids.

COMPATIBLE LUMINAIRES

- NCSC-R4D1TW: 4" Contractor Series Can-less Downlight with Deep Reflector
- NCSC-R4W2TW: 4" Contractor Series Can-less Wafer Downlight with Regressed Baffle
- NCSC-R6W2TW: 6" Contractor Series Can-less Wafer Downlight with Regressed Baffle
- NEFLINTW-R4: 4" FLIN Wafer LED Downlight
- NEFLINTW-R6: 6" FLIN Wafer LED Downlight
- NFLAT-R4TW: 4" FLAT Non-Metallic LED Downlight
- NFLAT-R6TW: 6" FLAT Non-Metallic LED Downlight
- NFLINA-R4TW: 4" FLIN Adjustable LED Downlight
- NFLINA-R6TW: 6" FLIN Adjustable LED Downlight
- NFRC-R4W1TW: 4" Fire Rated Flat LED Downlight
- NFRC-R4W2TW: 4" Fire Rated Baffle LED Downlight
- NFRC-R4W3TW: 4" Fire Rated Regressed LED Downlight
- NFRC-R6W1TW: 6" Fire Rated Flat LED Downlight
- NFRC-R6W2TW: 6" Fire Rated Baffle LED Downlight
- NFRC-R6W3TW: 6" Fire Rated Regressed LED Downlight
- NLTH-41TW: 4" Theia LED Downlight
- NLTH-61TW: 6" Theia LED Downlight
- NM2-2RDC: 2" M2 LED Downlight
- NM2-2RDCS: 2" M2 LED Lensed Downlight
- NM2-2SDC: 2" M2 Square LED Downlight
- NM2-2SB: 2" M2 Square LED Baffle Downlight
- NM2-2RG: 2" M2 LED Adjustable Gimbal
- NM2-2R270: 2" M2 LED Adjustable Elbow
- NM4-RG: 4" M4 LED Adjustable Gimbal
- NM4-R470: 4" M4 LED Adjustable Elbow

PRODUCT IMAGES AND DIMENSIONS

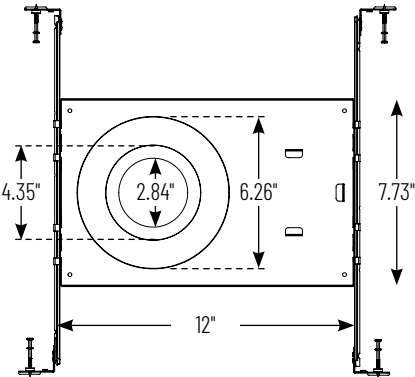

Universal New Construction Frame-In for LED luminaires

Description
NF-R246 = Universal New Construction Frame-In

Example: NF-R246 = Universal New Construction Frame-In for LED luminaires