



Project:
Catalog #:
Fixture Type:
Notes:

DP G2

LED E26 Plug Base Downlight

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

DP 6R
6" Round

DP 4R
4" Round

Life should be easier and the **DP G2 LED Downlight** has your lighting needs covered. Switch selectable CCT for maximum stocking solution needs and beautiful deep regress design for glare reduction and improved atmosphere. A simple plug-in solution for your retrofit lighting needs. Your experience matters.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
DP 4R 8 G2 9FSK	LED E26 Plug Base Downlight, 4 in round, White finish	750 Lm	10 W	Selectable 2700K - 5000K	120V
DP 6R 11 G2 9FSK	LED E26 Plug Base Downlight, 6 in round, White finish	1,100 Lm	15 W	Selectable 2700K - 5000K	120V

ORDERING GUIDE

Example: DP 4R 8 G2 9FSK

Fixture Type	Size	Lumen Output	Generation	Voltage	Selectable CCT	Finish	Emergency Backup
• DP Plug Base Downlight	• 4R 4" Round	• 8 750 Lm / 10W	• G2 Second Generation	• BLANK 120 V	• 9FSK 2700K 3000K 3500K 4000K 5000K 90 CRI	• BLANK White	• BLANK None • EMA DH20T-UNV-T10 Emergency Battery Kit 20W
	• 6R 6" Round	• 11 1,100 Lm / 15W					

Performance Information

Series Number	Lumens	Wattage	CCT
DP 4R 8 G2 9FSK	750 Lm	10 W	2700K/ 3000K/3500K/ 4000K/5000K
DP 6R 11 G2 9FSK	1,100 Lm	15 W	

Specifications

Housing

PC plastic driver box, spinning iron reflector, optical PC deffuser.

Ambient Temperature

Suitable for use in -25° C to 40° C (-13° F to 104° F).

Mounting

Retrofit recessed mount

Efficacy

Up to 83 lumens per watt.

CCT and CRI

Field selectable: 2700K, 3000K, 3500K, 4000K, and 5000K.
CRI 90.

Lifespan

L70 > 50,000 hours @25°C (77°F).

Lumen Output

750 Lm (**4R**), 1,100 Lm (**6R**).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical



Standard 120V AC, 50/60 Hz
TRIAC/ELV, 10-100% smooth dimming
PF: >0.9,

Certifications

ENERGY STAR® Certified. ETL pending. Certified to the high efficacy requirements of California T24 JA8 and T20. Suitable for damp and wet locations (indoor covered ceilings, non-conductive trim).

Dimensions

DP G2

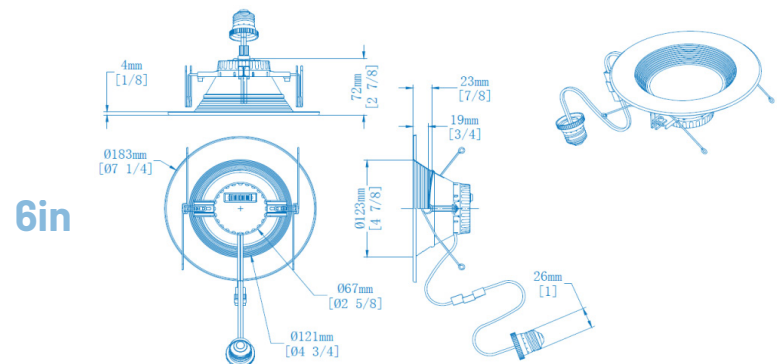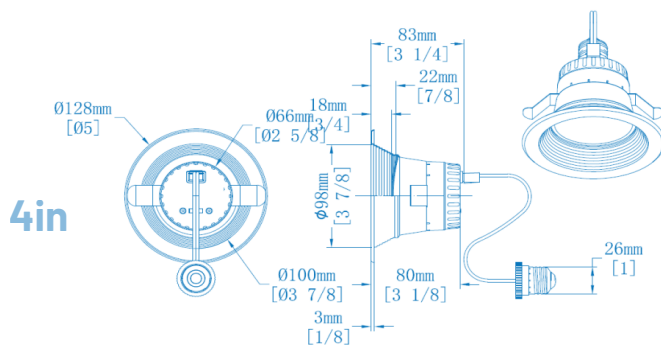

Accessories



EMA-DH20T-UNV-110

Emergency Backup

Electrical Load

		Current (A)
	Wattage	120V
DP 4R 8 G2 9FSK	10 W	0.08
DP 6R 11 G2 9FSK	15 W	0.13

Compatible Dimmer

No.	Brand	Model No.	Dim off
1	Leviton	IPL06-10Z	YES
2	Legrand	HCL453PTCCCV6	
3	Lutron	DV-603P-LA	
4	Lutron	DVCL-153P	
5	Lutron	PD-6WCL	
6	HUBBELL	RSDL06	



Shipping Information

Product Number	Master Carton Box Size	Carton Box Weight	# Per Carton	Individual box size	Individual box weight
DP 4R 8 G2 9FSK	17.48" x 15.24" x 12.52"	-	24		
DP 6R 11 G2 9FSK	24.57" x 15.24 x 17.24"	-	24		