

Surface LED Fixtures

- Universal voltage (120-277 VAC)
- No ballast, includes direct wire LED tubes
- 50,000 hour lifetime



With available wireguard



With available prismatic lens

Toggled® direct wire LED fixtures are an ideal complement or full replacement for existing fluorescent T8/T12 fixtures. Every fixture uses direct wire technology so there's no additional wiring set-up required. Offering a wide assortment of tube color temperature options (3000K to 6500K) as well as easy tube replacement at an LEDs lifespan ending, Toggled fixtures are designed to last well into the future.

Toggled direct wire LED fixtures do not use fluorescent ballasts. This allows for both energy savings as a result of no longer having to constantly power ballast(s) as well as cost savings from not requiring future ballast replacements as well as their associated maintenance costs.

Toggled fixtures are compatible with the entire Toggled LED tube product line.

Outstanding Product Performance

- Provides up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Designed for direct connection to building AC power, voltage 120-277 VAC
- Operating temperature -20 to 45° C

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL listed

Commercial-Grade

- Reliable start during cold temperatures
- All metal construction
- Durable white powder-coated finish

Ordering Information

Fixture	Type	Length	# Lamps	Style	Lens	Wire Termination	Tube Model #
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
F = Fixture	S = Strip/ Surface	4 = 4 feet	2 = 2 lamps	0 = Standard	P = Prismatic W = Wireguard	0 = None	See Specifications


Surface LED Fixtures

Specifications

Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
FS420P0-E416-30310	4 feet	120-277 VAC	32	2,940	92	≥80	3000K	>0.9
FS420P0-E416-40310	4 feet	120-277 VAC	32	2,940	92	≥80	4000K	>0.9
FS420P0-E416-50310	4 feet	120-277 VAC	32	2,940	92	≥80	5000K	>0.9
FS420P0-E416-65310	4 feet	120-277 VAC	32	2,940	92	≥80	6500K	>0.9
FS420P0-E425-40320	4 feet	120-277 VAC	50	5,600	112	≥80	4000K	>0.9
FS420P0-E425-50320	4 feet	120-277 VAC	50	5,600	112	≥80	5000K	>0.9
FS420P0-E425-65320	4 feet	120-277 VAC	50	5,600	112	≥80	6500K	>0.9
FS420W0-E416-30310	4 feet	120-277 VAC	32	4,200	131	≥80	3000K	>0.9
FS420W0-E416-40310	4 feet	120-277 VAC	32	4,200	131	≥80	4000K	>0.9
FS420W0-E416-50310	4 feet	120-277 VAC	32	4,200	131	≥80	5000K	>0.9
FS420W0-E416-65310	4 feet	120-277 VAC	32	4,200	131	≥80	6500K	>0.9
FS420W0-E425-40320	4 feet	120-277 VAC	50	8,000	135	≥80	4000K	>0.9
FS420W0-E425-50320	4 feet	120-277 VAC	50	8,000	135	≥80	5000K	>0.9
FS420W0-E425-65320	4 feet	120-277 VAC	50	8,000	135	≥80	6500K	>0.9

Note - Performance for prismatic models are estimated based upon 70% efficiency when utilizing a prismatic lens.

Dimensions

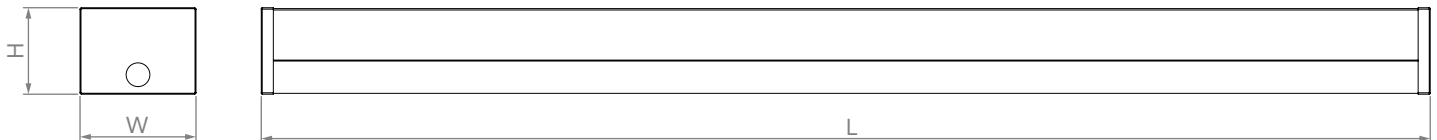

Fixture Model No.	Length	Width	Height
FS420P0	48.5in (1231mm)	4.8in (122mm)	3.6in (91mm)
FS420W0	48.5in (1231mm)	4.8in (122mm)	3.6in (91mm)



Disclaimer: Toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.