

RAB

VAN34




The next generation of canopy lighting.
The field-adjustable, budget-friendly VAN34.



Small package, big flexibility.

Designed to cover the footprint of old HID canopy lights, the VAN34 is available in one size that comes in three different field-adjustable power packages (each with selectable CCTs). It delivers the output your space needs, all with a super-slim profile.

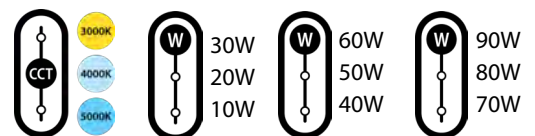



Feature Page



100,000-HOUR
LED LIFESPAN



120-277V



DIMMABLE



IP RATING



WET RATED



HE
HIGH
EFFICACY



ON/OFF PHOTOCELL



5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty




CLEAR FLAT LENS

FROSTED FLAT LENS

CLEAR DROP LENS

FROSTED DROP FROSTED

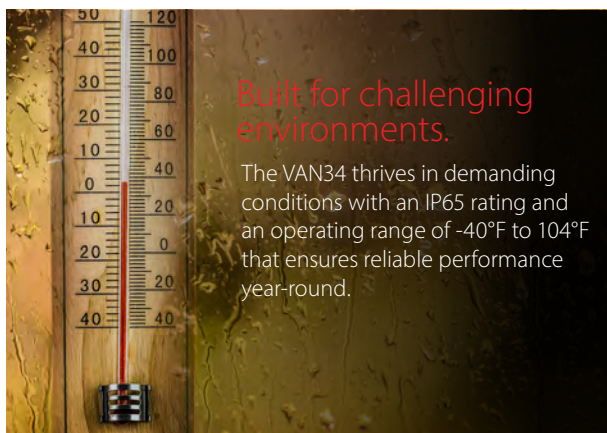


Built for challenging environments.

The VAN34 thrives in demanding conditions with an IP65 rating and an operating range of -40°F to 104°F that ensures reliable performance year-round.

Designed to adapt.

The VAN34 is perfect for canopies, walkways, and entry areas where precise lighting matters. The family includes flat or drop lens options, in both clear and frosted models to dial in your light distribution and appearance. It's also compatible with our existing [VANLED RETROPLATES](#).



WHITE



BRONZE



CLEAR
LENS





FROSTED
LENS



Turtle-friendly lighting.

For coastal areas that need to minimize the risk of disruption to wildlife, VAN34 is available in amber light models.

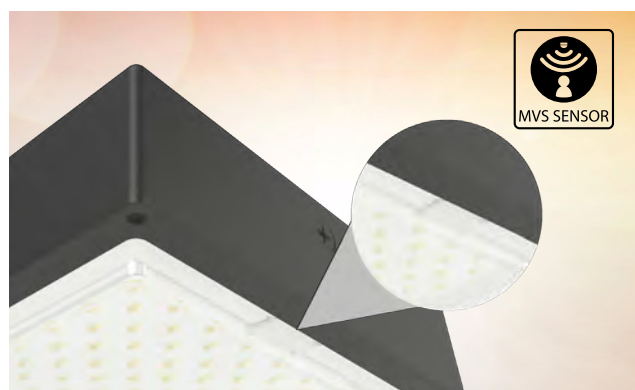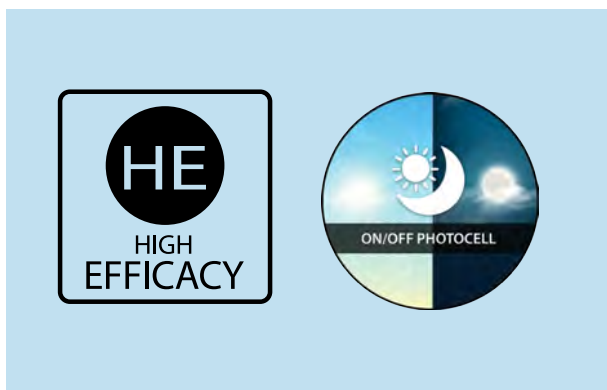

Energy savings = cost savings.

An integrated on/off photocell provides hassle-free, energy-saving operation and with an efficacy of up to 170 lm/w, the VAN34 does all it can to get those energy costs down!

Control options.

Various controls are available, including standard or Lightcloud Blue microwave sensors and a Lightcloud Controller. 120-277V models are also offered with a battery backup.

Ordering Matrix

Standard

Product Family	Wattage	Color Temp	Lens	Finish	Driver	Controls	Battery Backup
VAN34	-	-	-	-	-	-	-
	30 30/20/10W 60 60/50/40W 90 90/80/70W	Blank 3000/4000/5000K CCT Adjustable	Blank Drop Lens F Flat Lens FR Frosted Drop Lens FFR Frosted Flat Lens	Blank Bronze W White	Blank 120-277V, 0-10V Dimming 480V, 0-10V Dimming /480	Blank /MVS /LC /LCBS/MVS On/Off Photocell Microwave Sensor Lightcloud Lightcloud Blue w/MVS Sensor	Blank /E None Battery Backup+

+Battery backup only available on 120-277V models.

Amber

Product Family	Wattage	Color Temp	Lens	Finish	Driver	Controls
VAN34	-	YA	-	-	-	-
	60 60W	YA Amber	Blank Drop Lens F Flat Lens FR Frosted Drop Lens FFR Frosted Flat Lens	Blank Bronze W White	Blank 120-277V, 0-10V Dimming	Blank /MVS /LCBS/MVS On/Off Photocell Microwave Sensor Lightcloud Blue w/MVS Sensor