

c		ヽ∧T	\cap	\Box	
SE	Γ	J A Π	IUN	SH	

Type:

Model:

MIGHTY MIGHT LED Uplight Fixture

ORDERING CODE:

490003

490003-FS (floating socket)

SPECIFICATIONS

HOUSING:

Spun brass.

FINISH:

Weathered brass. Custom powder coated colors available.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket accepts bi-pin lamps with G4, GU5.3 or GY6.35 base.

LENS:

Clear tempered glass.

LAMP TYPE:

12V MR16. LED recommended. 30W halogen or 7W LED maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included.

WIRING

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The Mighty Might uplight features a shroud with O-rings for long-lasting protection. Mounting options are plentiful. Dozens of MR16 LED lamp choices available.

DIMENSIONS:

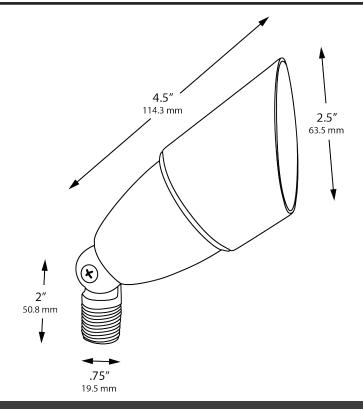



SPECIFICATION SHEET Page 2 MIGHTY MIGHT LED Uplight Fixture

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490003-4W-25-2700K-MS-R2





FIXTURE LAMP				MOUNTING	RISER
490003	WATTAGE	BEAM SPREAD	COLOR TEMP.	MS Composite stake (incl.) 490034	R2 2" BRASS RISER 490038
490003-FS (floating socket)	2W	25° / 40° / 60°	2700K / 3000K	M3 Trident Heavy-Duty 3-Prong Stake 490036	R3 3" BRASS RISER 490039
	3W	3W 25° / 40° / 60°	2700K / 3000K	PM Round pier mount 490057	R6 6" BRASS RISER 490031
	4W	15° / 25° / 40° / 60°	2700K / 3000K	MR Round tapered 3-hole surface mount 490048	R12 12" BRASS RISER 490032
		15° / 25° / 40° / 60°	2700K / 3000K	MP PVC/Brass post stake 490037	R24 24" BRASS RISER 490033
	5W	25°	Amber / Blue / Green / Red	GM Brass gutter mount 490047	
	5W	38°	Purple		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		