

3-0102

Outdoor Light



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: Injection Molding with Semi-clear Acrylic

Electrical

Built-in with or without Photo Cell


Lamp

LED Type: Integrate LED Module, More Color Temperature Option 4000K, 5000K

GU24 Type: GU24 CFL Bulb, More Color Temperature Option 2700K, 4000K

Certification

UL/cUL, ETL/cETL Listed, Suitable for Wet Locations

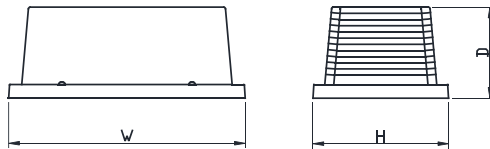

LED Type

| Model | Input Voltage | Input Wattage | LED CT/CRI | Lumen (TYP) | Dimension (W x H X D) | Energy Star |
|---------------|---------------|---------------|-------------|-------------|-----------------------|-------------|
| 3-0102D-xxxxK | 120V | 15W | 4000K / >80 | 1300 | 10.5" x 6.0" x 4.2" | Yes |

GU24 Type

| Model | Input Voltage | Input Wattage | Shade | Lamp | Dimension (W x H X D) | Energy Star |
|--------------|---------------|---------------|---------|--------------|-----------------------|-------------|
| 3-0102PG-118 | 120V | 18W | Acrylic | 1 x 18W GU24 | 10.5" x 6.0" x 4.2" | --- |