

# LTRL SERIES

Commercial Lighting

## LTRL-2X4-MCTP4

ARCHITECTURAL ADVANCED BLADE DESIGN TROFFER



Multi Color Temperature &  
Multi Power/Wattage (Selectable)



The Architectural Advanced Blade Design Troffer is a high-performance lighting fixture designed for modern interiors. Featuring an innovative blade-style diffuser, it delivers uniform, glare-free illumination while enhancing architectural aesthetics. Ideal for commercial and office spaces, this troffer offers energy efficiency, sleek design, and advanced optical control for optimal lighting distribution.

## Features

- 5-Year Warranty
- White Finish
- Rated Life: 50,000 Hours
- Multi CCT & Power  
(Selectable Switch On Back Of Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 50W/60W/72W
- Power Factor: >0.97
- Efficacy: 115 LPW

### Mechanical:

- White Finish
- Cold-Rolled Steel
- Earthquake Hooks Built Into The Housing
- Operating Temperature: -4°F ~ 122°F
- 5-Year Warranty


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note:

Type:

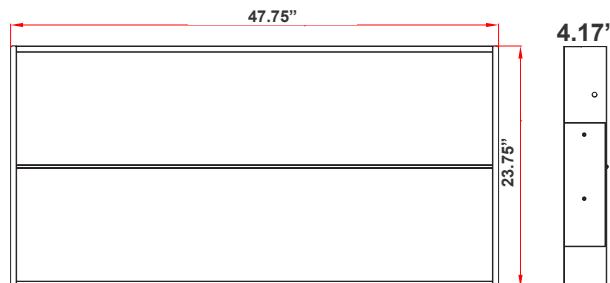

47.75"(W) x 23.75"(H) x 4.17"(D)

### Lighting:

- Multi CCT & Power  
(Selectable Switch On Back Of Fixture)
- Dimmable: 0~10V Dimming
- LED Type: SMD 2835
- Total Lumens: 8280LM Max.
- Color Rendering Index: CRI ≥ 80
- Color Temperatures: 3500K/ 4000K/ 5000K
- Rated Life: 50,000 Hours

### Applications:

- Commercial Offices – Provides uniform, glare-free lighting for a comfortable workspace.
- Educational Facilities – Enhances learning environments with efficient and visually appealing illumination.
- Healthcare Settings – Delivers high-quality lighting that supports visibility and comfort.
- Retail Spaces – Enhances product displays with well-distributed, stylish lighting.
- Hospitality & Lobbies – Creates an inviting ambiance with architectural aesthetics.

### Other Models:



- 50W | 5750LM | LTRL-2X2-MCTP4




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



## Photometrics: LTRL-2X4-MCTP4



BUG Rating: B2-U3-G2

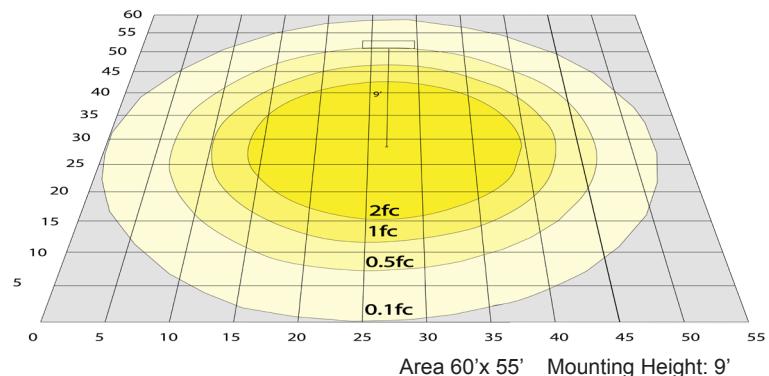

## Other Views:



Side View



Front View

## Performance Table: LTRL-2X4-MCTP4

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRL-2X4-MCTP4	50W 60W 72W	120~277V	5750LM 6900LM 8280LM	3000K 3500K 4000K 5000K	B2-U3-G2	115

## Sample Ordering

**Model      Size      Watt/Color Temp.**

LTRL - 2X4 - MCTP

## Factory-Installed Options:



Blank = No Option For Accessories

OPT-EM-LTRL = EMERGENCY BACKUP BATTERY MOUNTED ON TOP OF FIXTURE

OPT-FWH-6 = 6FT 3-WIRE WHIP

OPT-FWH-65 = 6FT 5-WIRE WHIP

OPT-FWH-66 = 6FT 6-WIRE WHIP

OPT-SEN-3MRLV-5 =PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

### BUILT-IN SWITCH:



MULTI-CCT & WATTAGE

### FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRL



OPT-SEN-3MRLV-5



OPT-FWH-63

OPT-FWH-65

OPT-FWH-66

