



3CCT Version




Specifications

Color	3CCT (3500K, 4000K, 5000K)
Wattage	22 W
Length	4ft
CRI	>80
Input Voltage	AC120-277V
Light Output	2900 lm
Power Factor	>0.9
Luminous Efficiency	>130 lm/W
Emergency Time	90 minutes
Light Output on Battery	420 lm at 4W
Battery Operating Temperature	14°F ~ 104°F
Rated Hours	50,000 hours
Warranty	5-year *

* The 5-year warranty is provided under the assumption of performing no more than two 90-min battery discharge tests annually over five years. The warranty is void if performing more than ten 90-min battery discharge tests in five years.

Dimensions

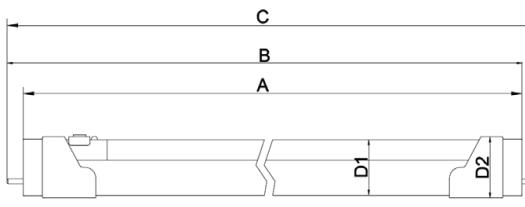

D1: 1.1" x 1.02"
D2: 1.25" x 1.1"

Features

- 2-in-1 tube: regular T5 lighting and emergency lighting
- Features a pair of patented locking lampholders that secures the tube in place
- Built-in lithium batteries
- Controllable by wall switch
- Manual testing button for a 30-second test and a 90-minute test
- 3CCT Select Switch (choose from 35K, 40K, 50K)
- 5-year warranty


Product Compliance & Certifications:

- **UL924 Certified**
- ETL Certified
- 90 minutes battery time per industry standard

Description

Aleddra's G2PRO Emergency T5 (3CCT version) sets the new industry standard as the first UL924 certified Emergency T5 tube that is operable with the wall switch. With two single-end wired sockets, one endcap of the tube is connected to the emergency power line and another to the wall switch, thus making it easy to turn on and off the T5 through the wall switch. During power outage, the Emergency T5 automatically draws power from its built-in battery and lasts more than 90 minutes on battery at 420 lm. The PRO Series features a patented locking lampholder that secures the tube in place, meeting UL924 safety requirements by preventing removal without a tool.

Wiring Diagram

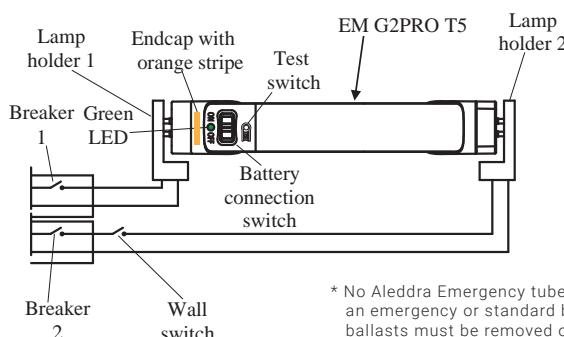

* No Aleddra Emergency tubes can be used with an emergency or standard ballasts. The existing ballasts must be removed or by-passed.

- Red-labeled endcap wired L & N to a constant-on circuit for charging the battery.
- White endcap wired L & N to a switched circuit for turning on/off the lamp.

Ordering Information

Product Model #	Wattage	Length
-----------------	---------	--------

LLT-4-EM-T5-G2PRO-22W-3CCT 22W 4ft

* No Aleddra Emergency tubes can be used with an emergency or standard ballasts. The existing ballasts must be removed or by-passed.