




INNOVATIVE ALUMINUM HEAT SINK WITH MULTIPLE SIZE OPTIONS TO FILL THE ENTIRE FIXTURE. Sox retrofits come in four lengths to adequately fill the long, narrow fixtures. Designed in the USA with a specified internal LED driver.

- 20W, 30W, 60W, and 100W models designed to replace 35W to 180W LPS SOX lamps
- Advanced active cooling provides excellent thermal management resulting in high light output & long life
- Directional light output delivers superior "dark sky" performance
- Support harness included
- 590nm, single color, narrow band LEDs are available to eliminate blue light emissions (see -AMB version on pg. 2)

THREE SPECTRAL OUTPUT CHOICES
 2200K (FULL SPECTRUM)
 4000K (FULL SPECTRUM)
 AMBER (590NM, NARROW BAND)

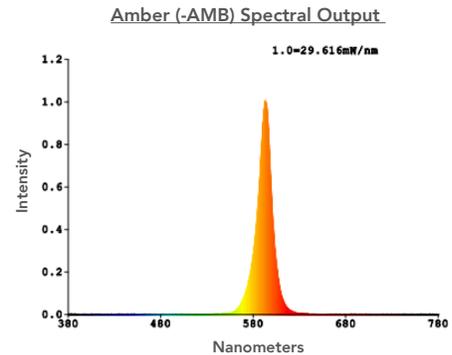

BALLAST BYPASS



BASE TYPE



CRI



ACTIVE COOLING



SURGE PROTECTION



-40°F TO 122°F


OPERATING TEMP



50,000hrs RATED LIFE

| PART # | UPC | REPLACES | WATTAGE | LUMENS | CCT | BASE |
|--------------|--------------|------------|---------|--------|-------|------|
| LED-8100-22K | 844006083779 | Up to 35W | 20W | 2030 | 2200K | B22D |
| LED-8101-22K | 844006083793 | Up to 55W | 35W | 3232 | 2200K | B22D |
| LED-8102-22K | 844006083816 | Up to 90W | 60W | 5769 | 2200K | B22D |
| LED-8104-22K | 844006083830 | Up to 180W | 100W | 11576 | 2200K | B22D |



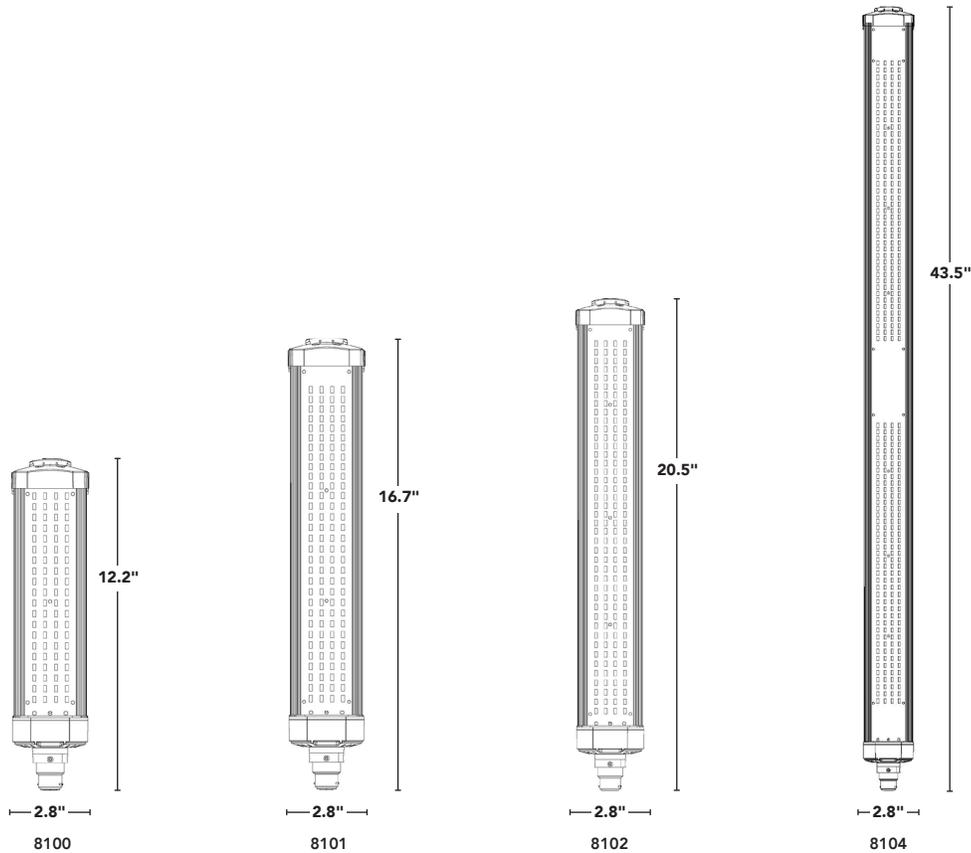

| PART # | UPC | REPLACES | WATTAGE | LUMENS | CCT | BASE |
|---------------|--------------|------------|---------|--------|-------|------|
| LED-8100-AMB* | 844006038359 | Up to 35W | 20W | 822 | AMBER | B22D |
| LED-8100-22K | 844006083779 | Up to 35W | 20W | 2030 | 2200K | B22D |
| LED-8100-40K | 844006083786 | Up to 35W | 20W | 3022 | 4000K | B22D |
| LED-8101-AMB* | 844006038366 | Up to 55W | 35W | 1258 | AMBER | B22D |
| LED-8101-22K | 844006083793 | Up to 55W | 35W | 3232 | 2200K | B22D |
| LED-8101-40K | 844006083809 | Up to 55W | 35W | 5156 | 4000K | B22D |
| LED-8102-AMB* | 844006038373 | Up to 90W | 60W | 1657 | AMBER | B22D |
| LED-8102-22K | 844006083816 | Up to 90W | 60W | 5769 | 2200K | B22D |
| LED-8102-40K | 844006083823 | Up to 90W | 60W | 8198 | 4000K | B22D |
| LED-8104-AMB* | 844006038380 | Up to 180W | 100W | 2873 | AMBER | B22D |
| LED-8104-22K | 844006083830 | Up to 180W | 100W | 11576 | 2200K | B22D |
| LED-8104-40K | 844006083847 | Up to 180W | 100W | 15472 | 4000K | B22D |

*SPECIAL ORDER ONLY